



<https://www.regital-newenergy.com>

Phone: 0760-86338890

E-mail: regital@regital-newenergy.com

E-mail: waizida@regital-newenergy.com

HK Address: 22/F,3 Lockhart Road,Wan Chai,HK

China Factory: 6F, Block 2, Run Ye Industrial Park, No. 18,

Luochen Road, Sanxiang Town, Zhongshan City,

Guangdong Province, China.

REGITAL NEW ENERGY

RESOURCES TECHNOLOGY LIMITED

EV Charger | Commercial EV Charger | Residential EV Charger | Portable EV Charger

ABOUT US

Regital New Energy Resources Technology Limited is a Hong Kong company that our main business is to export EV charger globally including Europe, UK, USA and Canada. We have our self-owned factory located in Zhongshan City of China. We do R&D, manufacturing and selling of EV chargers since year 2020. Our plant is ISO9001 certified by reputable SGS and managed by our Hong Kong managers.

With the rapid growing demand for electric car, we grasp the opportunities and develop our EV charger for global clients. In early year 2023, we have registered our brand name "WAIZIDA" and is becoming a popular brand in Europe and USA markets. Besides, we have successfully developed our 22KW AC EV charger in Year 2021 and now is our major and best-selling products in Europe and USA for our reputable clients.

As a major EV charger manufacturer, we are very concern on the Safety and Quality of our products. Our EV charges are all certified by Europe safety standards IEC-61851-1 and American safety standards UL 2594 and UL2231. Besides, certifications are not the only guarantee for safety of high voltage products, we also invest in establishing the automatically Safety Assurance Systems (SAS) that the system will base on the IEC 61851-1 and UL2594 /UL2231 safety parameters to test each EV charger individually after production. This is to make sure all products are surely safe and the best quality when using by our end users. All our individually chargers will be checked with 42-65 safety parameters and come with a testing report to confirm the products are 100% safe and in good quality condition.

Regital management team always believe Safety and Quality are the keys for success. For the New Energy Resource industry, we believe Product Safety and the Best Quality EV charger are our responsibility to fulfill the mission to save energy and, at the same time, contribute to provide a clean global environment for our next generation.

WAIZIDA

4000





EV charger production

3500 m²

Lines in production

50

R&D engineers

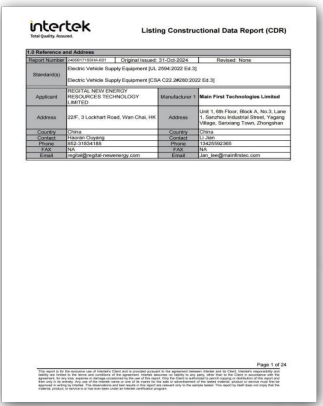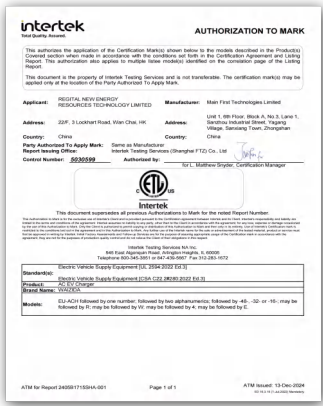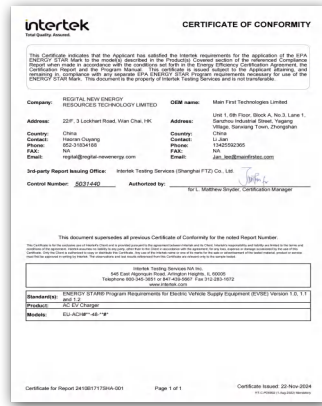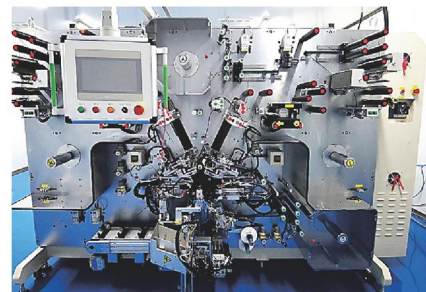



| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | | | | | AMERICAN STANDARD | | | | |
|--------------------------|---------------------------------|--|-----------------|------------------|------------------|------------------|---------------------|-----------------|------------------|------------------|------------------|
| PLUG AND CHARGE | | 60kW | 90KW | 120kW | 180kW | 240kW | 60kW | 90KW | 120kW | 180kW | 240kW |
| PARAMETER | Product Name | DC 60-240kW Charger | | | | | DC 60-240kW Charger | | | | |
| | Item No. | EE-DCPD22-60-D8 | EE-DCPD22-90-D8 | EE-DCPD22-120-D8 | EE-DCPD22-180-D8 | EE-DCPD22-240-D8 | EU-DCPD22-60-D8 | EU-DCPD22-90-D8 | EU-DCPD22-120-D8 | EU-DCPD22-180-D8 | EU-DCPD22-240-D8 |
| INPUT | Input Voltage | 380V±10% | | | | | 480V | | | | |
| | Frequency | 50Hz±10% | | | | | | | | | |
| | Power Factor | ≥0.99 | | | | | | | | | |
| OUTPUT | Range of Output Current | MAX 250A | | | | | MAX 250A | | | | |
| | Output Voltage | 200V-1000V | | | | | | | | | |
| INTERFACE | LED Indicator Lamp | Support | | | | | | | | | |
| | Display Screen | 7" LCD Touch Screen | | | | | | | | | |
| | LCD Advertising Screen | 43 Inch LCD Advertising Screen Brightness : 2000cd/㎡ | | | | | | | | | |
| | Language | Chinese, English, French, German, Spanish, Russian, etc. | | | | | | | | | |
| | NO. of Charging Gun | Single / Dual | | | | | | | | | |
| | Charging Mode | Automatic Charging / Electricity Volume Charging / Amount Charging / Timing Charging | | | | | | | | | |
| | Payment | APP / RFID / POS | | | | | | | | | |
| COMMUNICATION | Network Connection | 4G/ Ethernet | | | | | | | | | |
| | Communication Protocols | OCPP1.6J / OCPP2.0 | | | | | | | | | |
| ELECTRICAL PARAMETERS | Protection Limit | ≥110% | | | | | | | | | |
| | Stabilizing Voltage Accuracy | ≤±0.5% | | | | | | | | | |
| | Stabilizing Current Accuracy | ≤±1% | | | | | | | | | |
| | Ripple Factor | ≤±1% | | | | | | | | | |
| | Efficiency | ≥95% | | | | | | | | | |
| | Power factor | ≥0.99 (Over 50% Load) | | | | | | | | | |
| | THD | ≤5% (Over 50% Load) | | | | | | | | | |
| ENVIRONMENTAL PARAMETERS | Operating Temperature | - 20℃~+55℃ | | | | | | | | | |
| | Operating Humidity | 5%~95% No Frosting | | | | | | | | | |
| | Protection | IP54 | | | | | | | | | |
| | Acoustic Noise | <60dB | | | | | | | | | |
| | Cooling Method | Forced Air-Cooling | | | | | | | | | |
| | MTBF | 100,000 hours | | | | | | | | | |
| SAFETY | Safety Protection | Temperature Detection of Charging Gun / Over-Voltage Protection / Under Voltage Protection / Over Load Protection/ Short Circuit Protection / Grounding Protection / Over Temperature Protection / Low Temperature Protection / Insulation Detection Protection / Polarity Reverse Protection / Lightning Protection / Emergency Stop Protection /Leakage Protection | | | | | | | | | |
| | Standard | IEC/EN 61851-1,IEC/EN 61851-21-2,EN 301 489-1/3/17,EN 301 908-1/2/13,UL 2202,UL2231,UL2251 | | | | | | | | | |
| | Certification | ECM | | | | | In Processing | | | | |
| | LCD Advertising Screen Warranty | One Year | | | | | | | | | |
| | EV Charger Warranty | Two Years | | | | | | | | | |
| MECHANICAL | Dimension | 2.3*1.13*0.91m | | | | | | | | | |
| | Cable Length | 5m (Customization Acceptable) | | | | | | | | | |



- Power sharing**
Dynamically sharing power between 2 EVs charging in parallel
- Advertisement display**
43 inch high resolution display capable of streaming high quality pictures and videos
- Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
- Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
- RFID identification**
Authenticate charging sessions and oversee individual usage details
- Suitable for any environment**
IP54 and IK10 grades is suitable for public environments
- Integrated OCPP**
Compatibility with leading worldwide CPOs
- Cable management(90kW / 120kW / 240kW)**
- Payment APP, POS**
- OEM/ODM or private branding available**



| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | | | | AMERICAN STANDARD | | | |
|--------------------------|------------------------------|---|------------------|------------------|------------------|---------------------|------------------|------------------|------------------|
| PLUG AND CHARGE | | 60kW | 120kW | 180kW | 240kW | 60kW | 120kW | 180kW | 240kW |
| PARAMETER | Product Name | DC 60-240kW Charger | | | | DC 60-240kW Charger | | | |
| | Item No. | EE-DCPD22-60-D2 | EE-DCPD22-120-D2 | EE-DCPD22-180-D2 | EE-DCPD22-240-D2 | EU-DCPD22-60-D2 | EU-DCPD22-120-D2 | EU-DCPD22-180-D2 | EU-DCPD22-240-D2 |
| INPUT | Input Voltage | 380V±10% | | | | 480V | | | |
| | Frequency | 50Hz±10% | | | | | | | |
| | Power Factor | ≥0.99 | | | | | | | |
| OUTPUT | Range of Output Current | 0-200A | 0-250A | | | 0-200A | 0-250A | | |
| | Output Voltage | 200V-1000V | | | | | | | |
| INTERFACE | LED Indicator Lamp | Support | | | | | | | |
| | Display Screen | 7" LCD Touch Screen | | | | | | | |
| | Language | Chinese, English, French, German, Spanish, Russian, etc. | | | | | | | |
| | NO. of Charging Gun | Single / Dual | | | | | | | |
| | Charging Mode | Automatic Charging / Electricity Volume Charging / Amount Charging / Timing Charging | | | | | | | |
| | Payment | APP / RFID / POS | | | | | | | |
| COMMUNICATION | Network Connection | 4G/ Ethernet | | | | | | | |
| | Communication Protocols | OCPP1.6J / OCPP2.0 | | | | | | | |
| ELECTRICAL PARAMETERS | Protection Limit | ≥110% | | | | | | | |
| | Stabilizing Voltage Accuracy | ≤±0.5% | | | | | | | |
| | Stabilizing Current Accuracy | ≤±1% | | | | | | | |
| | Ripple Factor | ≤±1% | | | | | | | |
| | Efficiency | ≥95% | | | | | | | |
| | Power factor | ≥0.99 (Over 50% Load) | | | | | | | |
| | THD | ≤5% (Over 50% Load) | | | | | | | |
| ENVIRONMENTAL PARAMETERS | Operating Temperature | - 20℃ ~ +55℃ | | | | | | | |
| | Operating Humidity | 5%~95% No Frosting | | | | | | | |
| | Protection | IP54 | | | | | | | |
| | Acoustic Noise | <60dB | | | | | | | |
| | Cooling Method | Forced Air-Cooling | | | | | | | |
| | MTBF | 100,000 hours | | | | | | | |
| SAFETY | Safety Protection | Temperature Detection of Charging Gun / Over-Voltage Protection / Under Voltage Protection / Over Load Protection/ Short Circuit Protection / Grounding Protection / Over Temperature Protection / Low Temperature Protection / Insulation Detection Protection / Polarity Reverse Protection / Lightning Protection / Emergency Stop Protection /Leakage Protection | | | | | | | |
| | Standard | IEC/EN 61851-1,IEC/EN 61851-21-2,EN 301 489-1/3/17,EN 301 908-1/2/13,UL 2202,UL2231,UL2251 | | | | | | | |
| | Certification | ECM | | | | In Processing | | | |
| | Warranty | Two Years | | | | | | | |
| MECHANICAL | Dimension | 1.8*1.7*0.7m | | | | | | | |
| | Cable Length | 5m (Customization Acceptable) | | | | | | | |



- 7" Touch Screen interface**
Monitor and control charging easily through the integrated touch screen
- Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
- DC Charging Station Dynamic Charging Allocation**
Allows one vehicle to be charged with up to the maximum power or two vehicle simultaneously at average charging power score each
- RFID identification**
Authenticate charging sessions and oversee individual usage details
- Suitable for any environment**
IP54 and IK10 grades is suitable for public environments
- Integrated OCPP**
Compatibility with leading worldwide CPOs
- Cable management(90kW / 120kW / 240kW)**
- Payment APP, POS**
- OEM/ODM or private branding available**







SPECIFICATIONS

| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | | | AMERICAN STANDARD | | |
|-----------------------|-------------------------|---|-----------------|-----------------|--------------------|-----------------|-----------------|
| PLUG AND CHARGE | | 20kW | 30kW | 40kW | 20kW | 30kW | 40kW |
| PARAMETER | Product Name | DC 20-40kW Charger | | | DC 20-40kW Charger | | |
| | Item No. | EE-DCPD22-20-D1 | EE-DCPD22-30-D1 | EE-DCPD22-40-D1 | EU-DCPD22-20-D1 | EU-DCPD22-30-D1 | EU-DCPD22-40-D1 |
| INPUT | Input Voltage | 380V±10% | | | 480V | | |
| | Frequency | 50Hz±10% | | | | | |
| | Power Factor | ≥0.99 | | | | | |
| | Efficiency | 95% | | | | | |
| OUTPUT | Output Current | 0~66.5A | 0~100A | 0~133A | 0~66.5A | 0~100A | 0~133A |
| | Rated Voltage | DC 150- 1000V | | | | | |
| INTERFACE | Display | 7" Touch Screen | | | | | |
| | Language | Chinese, English, French, German, Spanish, Russian, etc. | | | | | |
| | NO. of Charging gun | Single / Dual | | | | | |
| | Payment | APP/RFID/POS | | | | | |
| COMMUNICATION | Network Connection | 4G(GSM or CDMA)/Ethernet | | | | | |
| | Communication Protocols | OCPP1.6J / OCPP2.0 | | | | | |
| ELECTRICAL PARAMETERS | Storage Temperature | -20℃~-+50℃ | | | | | |
| | Operating Humidity | ≤95% | | | | | |
| | Protection | IP54 | | | | | |
| | Acoustic Noise | <60dB | | | | | |
| | Cooling Method | Forced Air-Cooling | | | | | |
| SAFETY | Safety Protection | Temperature detection of charging gun / Over-voltage protection / Under voltage protection / Over load protection / Short circuit protection / Grounding protection / Over temperature protection / Low temperature protection / Insulation detection protection / Polarity reverse protection / Lightning protection / Emergency stop protection /Leakage protection | | | | | |
| | Standard | IEC/EN 61851-1,IEC/EN 61851-21-2,EN 301 489-1/3/17,EN 301 908-1/2/13,UL 2202,UL2231,UL2251 | | | | | |
| | Certification | ECM | | | In Processing | | |
| | Warranty | Two Years | | | | | |
| MECHANICAL | Dimension | 500mm*360mm*155mm (20kW) 800mm*505mm*245mm (30/40kW) | | | | | |
| | Cable Length | 5m (Customization acceptable) | | | | | |












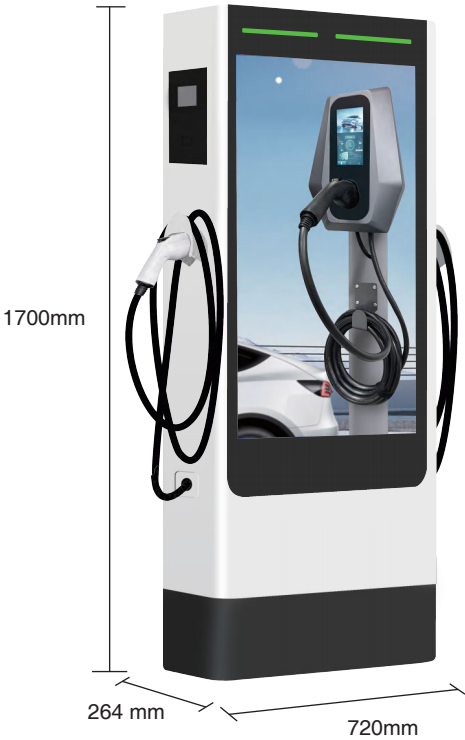

-  **7" Touch Screen interface**
7 inch control touch screen and indicator light
-  **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
-  **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
-  **RFID identification**
Authenticate charging sessions and oversee individual usage details
-  **Suitable for any environment**
The IP65 and IK10 grades is suitable for public environments
-  **Integrated OCPP**
Compatibility with leading worldwide CPOs
-  **OEM/ODM or private branding available**






| FLOOR MOUNTED CHARGER | | EUROPEAN STANDARD | AMERICAN STANDARD |
|-----------------------|---------------------|--|----------------------------|
| PARAMETER | Product Name | 44KW Dual Gun AC EV Charger | 96A Dual Gun AC EV Charger |
| | Item No. | EE-ACH101-44-2G2 | EU-ACP2G2-96 |
| TECHNICAL INFORMATION | Power Input Cable | L1,L2,L3,N,PE | L1,L2,PE |
| | Rated Voltage | 380V | 120V-240V |
| | Rated Current | 32A*2 | 48A*2 |
| | Rated Power | 44KW | / |
| INTERFACE | Plug Type | Type 2*2 | Type 1*2 |
| | Cable Length | 5M (Customization Acceptable) | |
| | Housing Material | Electrolytic plate+Stainless Steel | |
| | LED Indicator Lamp | Support | |
| | LED Screen | 4.3 Inch Control Screen+43 Inch LCD Advertising Screen | |
| | Display Parameters | Charge Voltage, Charge Current, Charge Quantity, Fault Code | |
| | Charging Way | Plug And Charge | |
| COMMUNICATION | Ethernet | Optional | |
| | 4G | Optional | |
| | OCPP | OCPP1.6J | |
| SAFETY | RCD | Type A +6mA DC | CCID20 |
| | IP Rate | Connector IP54 | |
| | Safety Protection | Emergency Stop/ Over Voltage Protection/ Under Voltage Protection/ Over Current Protection/ Leakage Current Protection/ Ground Protection/ Over Temperature Protection/ Short-circuit Protection/ Lightning Protection | |
| | Safety Standard | IEC/EN62752 | UL2231 |
| | Certification | CE/UKCA | In Processing |
| | Warranty | One Year | |
| INSTALLATION | Installing Type | Floor Mounted | |
| | Working Temperature | -25℃-50℃ | |
| | Working Humidity | 5%~95% | |
| | The Cooling Way | Natural Air Cooling | |
| | Dimension | 1700mm*720mm*264mm | |
| | Net Weight | 145.5kg | |
| | Gross Weight | 160kg | |









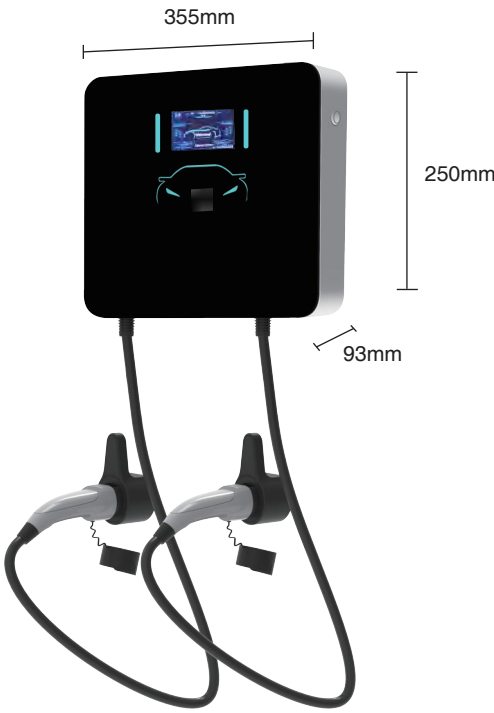

-  **Power sharing**
Dynamically sharing power between 2 EVs charging in parallel
-  **Advertisement display**
43 inch high resolution display capable of streaming high quality pictures and videos
-  **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
-  **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
-  **RFID identification**
Authenticate charging sessions and oversee individual usage details
-  **Suitable for any environment**
IP65 and IK10 grades is suitable for public environments
-  **Integrated OCPP**
Compatibility with leading worldwide CPOs
-  **OEM/ODM or private branding available**



| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | AMERICAN STANDARD |
|-----------------------|---------------------|--|----------------------------|
| PARAMETER | Product Name | 44KW Dual Gun AC EV Charger | 96A Dual Gun AC EV Charger |
| | Item No. | EE-ACH101-44-2FX | EU-ACH2FX-96 |
| TECHNICAL INFORMATION | Power Input Cable | L1,L2,L3,N,PE | L1,L2,PE |
| | Rated Voltage | 380V | 120V-240V |
| | Rated Current | 32A*2 | 48A*2 |
| | Rated Power | 44KW | / |
| FUNCTION | Plug Type | Type 2*2 | Type 1*2 |
| | Cable Length | 5M | |
| | Housing Material | Stainless Steel | |
| | LED Indicator Lamp | Support | |
| | LED Screen | 4.3 Inch Touch Screen | |
| | Display Parameters | Charge voltage, Charge current, Charge Quantity, Fault code | |
| | Charging Way | RFID/ Touch screen to action | |
| COMMUNICATION | Ethernet | Optional | |
| | 4G | Optional | |
| | OCPP | OCPP1.6J | |
| SAFETY | RCD | Type A +6mA DC | CCID20 |
| | IP Rate | Connector IP65 | |
| | Safety Protection | Over Voltage Protection/Under Voltage Protection/Over Current Protection/ Leakage Current Protection/Ground Protection/Over Temperature Protection | |
| | Safety Standard | IEC/EN62752 | UL2231 |
| | Certification | CE/UKCA | ETL, CSA, ENERGY STAR |
| | Warranty | One Year | |
| INSTALLATION | Installing Type | Column Mounted(Floor Mounted) or Wall Mounted Install Optional | |
| | Working Temperature | -25°C -50°C | |
| | Working Humidity | 5%~95% | |
| | The Cooling Way | Natural Air Cooling | |
| | Dimension | 355*250*93mm | |
| | Net Weight | 24.5kg | |
| | Gross Weight | 25.6kg | |











- **Simplified installation**
Support wall-mounted or floor standing, easy to install
- **Complete and intuitive interface**
Monitor all charging stages from the screen
- **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
- **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
- **RFID identification**
Authenticate charging sessions and oversee individual usage details
- **Suitable for any environment**
IP54 and IK10 grades is suitable for public environments
- **Integrated OCPP**
Compatibility with leading worldwide CPOs
- **OEM/ODM or private branding available**

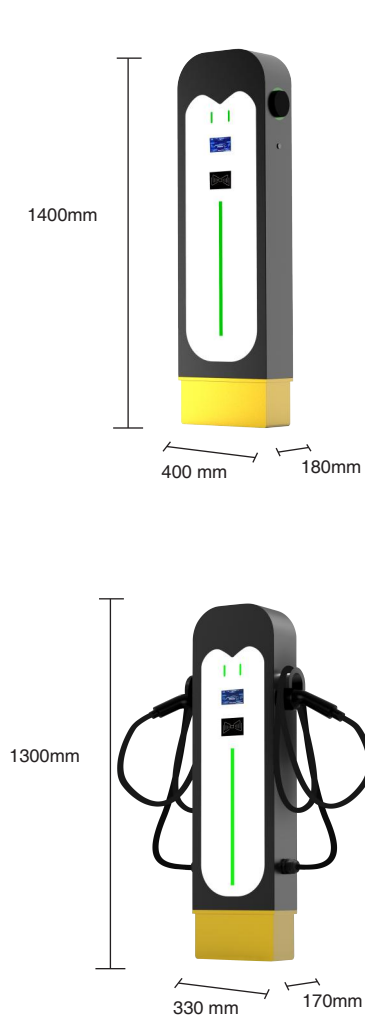



| FLOOR MOUNTED CHARGER | | EUROPEAN STANDARD | AMERICAN STANDARD |
|-----------------------|---------------------|--|----------------------------|
| PARAMETER | Product Name | 44KW Dual Gun AC EV Charger | 96A Dual Gun AC EV Charger |
| | Item No. | EE-ACH101-44-2A1 | EU-ACH2A1-96 |
| TECHNICAL INFORMATION | Power Input Cable | L1,L2,L3,N,PE | L1,L2,PE |
| | Rated Voltage | 380V | 120V-240V |
| | Rated Current | 32A*2 | 48A*2 |
| | Rated Power | 44KW | / |
| | Plug Type | Type 2*2 | Type 1*2 |
| INTERFACE | Cable Length | 5M (Customization Acceptable) | |
| | Housing Material | Electrolytic plate+Stainless Steel | |
| | LED Indicator Lamp | Optional | |
| | Screen | 4.3 Inch Control Screen | |
| | Display Parameters | Charge Voltage, Charge Current, Charge Quantity, Fault Code | |
| | Charging Way | Plug And Charge | |
| | | | |
| COMMUNICATION | Ethernet | Optional | |
| | 4G | Optional | |
| | OCPP | OCPP1.6J | |
| SAFETY | RCD | Type A +6mA DC | CCID20 |
| | IP Rate | Connector IP54 | |
| | Safety Protection | Emergency Stop/ Over Voltage Protection/ Under Voltage Protection/ Over Current Protection/ Leakage Current Protection/ Ground Protection/ Over Temperature Protection/ Short-circuit Protection/ Lightning Protection | |
| | Safety Standard | IEC/EN62752 | UL2231 |
| | Certification | CE/UKCA | ETL, CSA, ENERGY STAR |
| | Warranty | One Year | |
| | | | |
| INSTALLATION | Installing Type | Floor Mounted | |
| | Working Temperature | -25℃ -50℃ | |
| | Working Humidity | 5%~95% | |
| | The Cooling Way | Natural Air Cooling | |
| | Dimension | 1300mm*330mm*170mm | |
| | Net Weight | 30KG | |
| | Gross Weight | 43KG | |
| | | | |




-  **Complete and intuitive interface**
Monitor all charging stages from the screen
-  **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
-  **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
-  **RFID identification**
Authenticate charging sessions and oversee individual usage details
-  **Suitable for any environment**
IP65 and IK10 grades is suitable for public environments
-  **Integrated OCPP**
Compatibility with leading worldwide CPOs
-  **OEM/ODM or private branding available**




HIGH SPEED CHARGING

speed will never be an issue

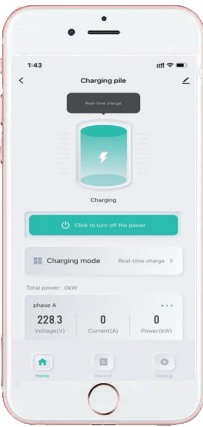



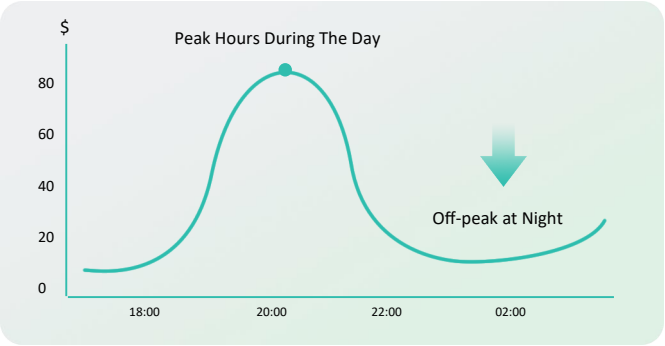





- Plan charging
- Monitor charging
- Record charging



- Stress-free Installation**
Plug and Play!
Plug into the CEE socket or hardwire connection without opening the box.
- Flexible Load Protection**
Flexible setting of power to ensure load safety and prevent tripping.
- Smart Home Charging with APP**
Full control of your wall box with App.
 - Schedule Charging**
Schedule off-peak charging to save charging cost.
 - InstaCharge**
Start charging immediately at the maximum available current for once.
 - Charging Record**
Review and filter charging history, one tap to export record via email.
 - Share Your Charger**
One tap to share limited charging access with your family and friends.

| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | | | BRITISH STANDARD | | | AMERICAN STANDARD | |
|-----------------------|---------------------------|---|--------------------|--------------------|-------------------------------|--------------------|--------------------|--|-------------------|
| PARAMETER | Product Name | 7KW AC EV Charger | 11KW AC EV Charger | 22KW AC EV Charger | 7KW AC EV Charger | 11KW AC EV Charger | 22KW AC EV Charger | 32A AC EV Charger | 48A AC EV Charger |
| | Item No. | EE-ACH101-07-2AX | EE-ACH101-11-2AX | EE-ACH101-22-2AX | EK-ACH6AX-07-P | EK-ACH6AX-11-P | EK-ACH6AX-22-P | EU-ACH2AX-32 | EU-ACH2AX-48 |
| INPUT | Power Input Cable | L,N,PE | L1,L2,L3,N,PE | L1,L2,L3,N,PE | L,N,PE | L1,L2,L3,N,PE | L1,L2,L3,N,PE | L1,L2,PE | L1,L2,PE |
| | Voltage Range | 184V~276V | 304V~456V | 304V~456V | 184V~276V | 304V~456V | 304V~456V | 110V-265V | 110V-265V |
| | Rated Current | 32A | 16A | 32A | 32A | 16A | 32A | 32A | 48A |
| OUTPUT | Rated Voltage | 230V | 380V | 380V | 230V | 380V | 380V | 120V-240V | 120V-240V |
| | Rated Current | 32A | 16A | 32A | 32A | 16A | 32A | 32A | 48A |
| | Rated Power | 7KW | 11KW | 22KW | 7KW | 11KW | 22KW | 7KW | 11KW |
| FUNCTION | Plug Type | Type 2 | | | | | | Type 1 | |
| | Cable Length | 5M | | | | | | | |
| | Housing Material | PC6110 (-20℃~80℃) OR PC9330 (-60℃~80℃) | | | | | | | |
| | LED Indicator Lamp | Optional | | | | | | | |
| | Screen | 4.3" TFT Screen/4.3" LCD Screen | | | | | | | |
| | RFID | Optional | | | | | | | |
| | Charging Way | AC EV Charging | | | | | | | |
| | Emergency Button | Support | | | | | | | |
| | Electronic Lock | Optional | | | | | | | |
| | License Plate Recognition | / | | | | | | | |
| | Face Recognition | / | | | | | | | |
| COMMUNICATION | WiFi | Optional | | | | | | | |
| | Bluetooth | Optional | | | | | | | |
| | Ethernet | Optional | | | | | | | |
| | 4G | Optional | | | | | | | |
| | RS485 | Optional | | | | | | | |
| | OCPP 1.6J | Optional | | | | | | | |
| | TLS 1.3 | Optional | | | | | | | |
| SAFETY | Electricity Metering | Support, but not as basis for billing | | | | | | | |
| | RCD | Type B (Type A +6mA DC) | | | | | | CCID20 | |
| | IP Rate | Connector IP67/ Control Box IP65 | | | | | | | |
| | Safety Protection | Emergency Stop/ Over Voltage Protection/ Under Voltage Protection/Over Current Protection/ Leakage Current Protection/ Ground Protection/ Over Temperature Protection/ Short-circuit Protection/ Lightning Protection | | | | | | | |
| | Built-in PEN Protection | Optional (No Earth Rod Needed) | | | Support (No Earth Rod Needed) | | | Optional (No Earth Rod Needed) | |
| | Safety Standard | EN/IEC 61851-1, EN/IEC 61851-21-2, EN62196 | | | | | | UL2231, UL2594, UL991, UL1998, FCCpart15B, NB33008.1 | |
| | Certification | CE/UKCA | | | | | | ETL, CSA, ENERGY STAR | |
| | Warranty | One Year | | | | | | | |
| INSTALLATION | Installing Type | Wall Mount/ Pillar Style | | | | | | | |
| | Working Temperature | -20℃-50℃ | | | | | | | |
| | Working Humidity | 5%-95% | | | | | | | |
| | Dimension | 360/250/115mm | | | | | | | |
| | Net Weight | 7.3KG | | | | | | | |
| | Gross Weight | 8.7KG | | | | | | | |
| CHARGER GUN | Connection Type | Case C/ Mode 3 | | | | | | | |










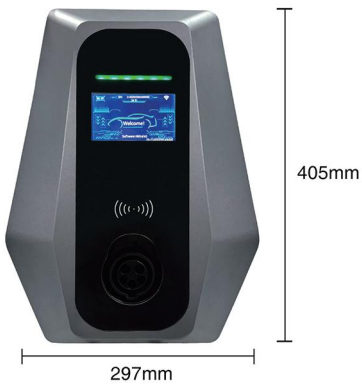

-  **Simplified installation**
Support wall-mounted or floor standing, can be install in 15 minutes
-  **Complete and intuitive interface**
Monitor all charging stages from the screen
-  **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
-  **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
-  **RFID identification**
Authenticate charging sessions and oversee individual usage details
-  **Suitable for any environment**
The IP65 and IK10 grades is suitable for public environments
-  **Integrated OCPP**
Compatibility with leading worldwide CPOs
-  **OEM/ODM or private branding available**



SPECIFICATIONS

| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | | | BRITISH STANDARD | | | AMERICAN STANDARD | |
|-----------------------|-------------------------|---|--------------------|--------------------|-------------------------------|--------------------|--------------------|--|-------------------|
| PARAMETER | Product Name | 7KW AC EV Charger | 11KW AC EV Charger | 22KW AC EV Charger | 7KW AC EV Charger | 11KW AC EV Charger | 22KW AC EV Charger | 32A AC EV Charger | 48A AC EV Charger |
| | Item No. | EE-ACH101-07-2AX | EE-ACH101-11-2AX | EE-ACH101-22-2AX | EK-ACH6BX-07-P | EK-ACH6BX-11-P | EK-ACH6BX-22-P | EU-ACH2AX-32 | EU-ACH2AX-48 |
| INPUT | Power Input Cable | L,N,PE | L1,L2,L3,N,PE | L1,L2,L3,N,PE | L,N,PE | L1,L2,L3,N,PE | L1,L2,L3,N,PE | L1,L2,PE | L1,L2,PE |
| | Voltage Range | 184V~276V | 304V~456V | 304V~456V | 184V~276V | 304V~456V | 304V~456V | 110V-265V | 110V-265V |
| | Rated Current | 32A | 16A | 32A | 32A | 16A | 32A | 32A | 48A |
| OUTPUT | Rated Voltage | 230V | 380V | 380V | 230V | 380V | 380V | 120V-240V | 120V-240V |
| | Rated Current | 32A | 16A | 32A | 32A | 16A | 32A | 32A | 48A |
| | Rated Power | 7KW | 11KW | 22KW | 7KW | 11KW | 22KW | 7KW | 11KW |
| FUNCTION | Plug Type | Type 2 | | | | | | Type 1 | |
| | Cable Length | 5M | | | | | | | |
| | Housing Material | PC6110 (-20℃~80℃) OR PC9330 (-60℃~80℃) | | | | | | | |
| | LED Indicator Lamp | Optional | | | | | | | |
| | Screen | 4.3" TFT Screen/4.3" LCD Screen | | | | | | | |
| | RFID | Optional | | | | | | | |
| | Charging Way | AC EV Charging | | | | | | | |
| | Emergency Button | Support | | | | | | | |
| | Electronic Lock | Optional | | | | | | | |
| COMMUNICATION | WiFi | Optional | | | | | | | |
| | Bluetooth | Optional | | | | | | | |
| | Ethernet | Optional | | | | | | | |
| | 4G | Optional | | | | | | | |
| | RS485 | Optional | | | | | | | |
| | OCPP 1.6J | Optional | | | | | | | |
| | TLS 1.3 | Optional | | | | | | | |
| SAFETY | Electricity Metering | Support, but not as basis for billing | | | | | | | |
| | RCD | Type B (Type A +6mA DC) | | | | | | CCID20 | |
| | IP Rate | Connector IP67/ Control Box IP65 | | | | | | | |
| | Safety Protection | Emergency Stop/ Over Voltage Protection/ Under Voltage Protection/Over Current Protection/ Leakage Current Protection/ Ground Protection/ Over Temperature Protection/ Short-circuit Protection/ Lightning Protection | | | | | | | |
| | Built-in PEN Protection | Optional (No Earth Rod Needed) | | | Support (No Earth Rod Needed) | | | Optional (No Earth Rod Needed) | |
| | Safety Standard | EN/IEC 61851-1, EN/IEC 61851-21-2, EN62196 | | | | | | UL2231, UL2594, UL991, UL1998, FCCpart15B, NB33008.1 | |
| | Certification | CE/UKCA | | | | | | ETL, CSA, ENERGY STAR | |
| | Warranty | One Year | | | | | | | |
| INSTALLATION | Installing Type | Wall Mount/ Pillar Style | | | | | | | |
| | Working Temperature | -20℃-50℃ | | | | | | | |
| | Working Humidity | 5%~95% | | | | | | | |
| | Dimension | 360/250/115mm | | | | | | | |
| | Net Weight | 7.3KG | | | | | | | |
| | Gross Weight | 8.7KG | | | | | | | |
| CHARGER GUN | Connection Type | Case C/ Mode 3 | | | | | | | |











- **Simplified installation**
Support wall-mounted or floor standing, can be install in 15 minutes
- **Complete and intuitive interface**
Monitor all charging stages from the screen
- **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
- **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
- **RFID identification**
Authenticate charging sessions and oversee individual usage details
- **Suitable for any environment**
The IP65 and IK10 grades is suitable for public environments
- **Integrated OCPP**
Compatibility with leading worldwide CPOs
- **OEM/ODM or private branding available**




| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | AMERICAN STANDARD |
|-----------------------|---------------------------|--|--|
| PARAMETER | Product Name | 7KW AC EV charger | 32A AC EV charger |
| | Item No. | EE-ACH101-07-2DX | EU-ACH2DX-32 |
| INPUT | Power Input Cable | L,N,PE | L1,L2,PE |
| | Voltage Range | 184V~276V | 110V-265V |
| | Rated Current | 32A | 32A |
| OUTPUT | Rated Voltage | 230V | 120V-240V |
| | Rated Current | 32A | 32A |
| | Rated Power | 7KW | 7KW |
| FUNCTION | Plug Type | Type 2 | Type 1 |
| | Cable Length | 5M | |
| | Housing Material | PC6110 (-20℃~80℃) OR PC9330 (-60℃~80℃) | |
| | LED Indicator Lamp | Optional | |
| | TFT Screen | 4.3" TFT Screen | |
| | RFID | Optional | |
| | Charging Way | AC EV Charging | |
| | Emergency Button | Support | |
| | Electronic Lock | Optional | |
| | License Plate Recognition | / | |
| COMMUNICATION | Face Recognition | / | |
| | WiFi | Optional | |
| | Bluetooth | Optional | |
| | Ethernet | Optional | |
| | 4G | Optional | |
| | RS485 | Optional | |
| SAFETY | OCPP 1.6J | Optional | |
| | Electricity Metering | Support, but not as basis for billing | |
| | RCD | Type A +6mA DC | CCID20 |
| | IP Rate | Connector IP67/Control Box IP65 | |
| | Safety Protection | Emergency Stop/ Over Voltage Protection/ Under Voltage Protection/ Over Current Protection/ Leakage Current Protection/ Ground Protection/ Over Temperature Protection/ Short-circuit Protection/ Lightning Protection | |
| | Built-in PEN Protection | Optional (No Earth Rod Needed) | |
| | Safety Standard | EN/IEC 61851-1, EN/IEC 61851-21-2, EN62196 | UL2231, UL2594, UL991, UL1998, FCC part 15B, NB33008.1 |
| | Certification | CE/UKCA | ETL, CSA, ENERGY STAR |
| INSTALLATION | Warranty | One Year | |
| | Installing Type | Wall Mount/ Pillar Style | |
| | Working Temperature | -25℃ -50℃ | |
| | Working Humidity | 5%~95% | |
| | Dimension | 152/239/96mm | |
| | Net Weight | 3.3KG | |
| CHARGER GUN | Gross Weight | 3.9KG | |
| | Connection Type | Case C/Mode 3 | |









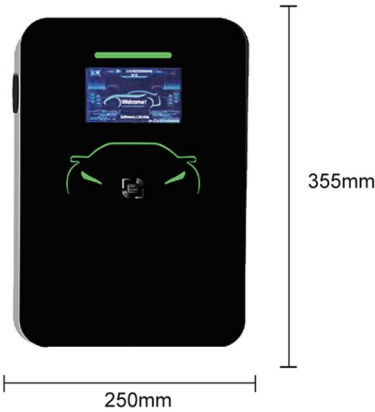

- **Simplified installation**
Support wall-mounted or floor standing, can be install in 15 minutes
- **Complete and intuitive interface**
Monitor all charging stages from the screen
- **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
- **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
- **RFID identification**
Authenticate charging sessions and oversee individual usage details
- **Suitable for any environment**
The IP65 and IK10 grades is suitable for public environments
- **Integrated OCPP**
Compatibility with leading worldwide CPOs
- **OEM/ODM or private branding available**



| WALL-MOUNT EV CHARGER | | EUROPEAN STANDARD | | | AMERICAN STANDARD | |
|-----------------------|---------------------------|--|--------------------|--------------------|--|-------------------|
| PARAMETER | Product Name | 7KW AC EV charger | 11KW AC EV charger | 22KW AC EV charger | 32A AC EV charger | 48A AC EV charger |
| | Item No. | EE-ACH101-07-2EX | EE-ACH101-11-2EX | EE-ACH101-22-2EX | EU-ACH2EX-32 | EU-ACH2EX-48 |
| INPUT | Power Input Cable | L,N,PE | L1,L2,L3,N,PE | L1,L2,L3,N,PE | L1,L2,PE | L1,L2,PE |
| | Voltage Range | 184V~276V | 304V~456V | 304V~456V | 110V-265V | 110V-265V |
| | Rated Current | 32A | 16A | 32A | 32A | 48A |
| OUTPUT | Rated Voltage | 230V | 380V | 380V | 120V-240V | 120V-240V |
| | Rated Current | 32A | 16A | 32A | 32A | 48A |
| | Rated Power | 7KW | 11KW | 22KW | 7KW | 11KW |
| FUNCTION | Plug Type | Type 2 | | | Type 1 | |
| | Cable Length | 5M/Charging Inlet | | | 5M | |
| | Housing Material | Aluminum Alloy | | | | |
| | LED Indicator Lamp | Support | | | | |
| | LED Screen | / | | | | |
| | TFT Screen | 4.3" TFT Screen | | | | |
| | RFID | Optional | | | | |
| | Charging Way | AC EV Charging | | | | |
| | Emergency Button | Support | | | | |
| | Electronic Lock | Charging Inlet Optional | | | | |
| | License Plate Recognition | / | | | | |
| | Face Recognition | / | | | | |
| COMMUNICATION | WiFi | Optional | | | | |
| | Bluetooth | Optional | | | | |
| | Ethernet | Optional | | | | |
| | 4G | Optional | | | | |
| | RS485 | Optional | | | | |
| | OCPP 1.6J | Optional | | | | |
| SAFETY | Electricity Metering | Support,but not as basis for billing | | | | |
| | RCD | Type A +6mA DC | | | CCID20 | |
| | IP Rate | Connector IP67/Control Box IP65 | | | | |
| | Safety Protection | Emergency Stop/ Over Voltage Protection/ Under Voltage Protection/ Over Current Protection/ Leakage Current Protection/ Ground Protection/ Over Temperature Protection/ Short-circuit Protection/ Lightning Protection | | | | |
| | Built-in PEN Protection | Optional (No Earth Rod Needed) | | | | |
| | Safety Standard | EN/IEC 61851-1, EN/IEC 61851-21-2,EN62196 | | | UL2231,UL2594, UL991,UL1998,FCCpart15B,NB33008.1 | |
| | Certification | CE/UKCA | | | ETL, CSA, ENERGY STAR | |
| | Warranty | One Year | | | | |
| INSTALLATION | Installing Type | Wall Mount/ Pillar Style | | | | |
| | Working Temperature | -20℃ -50℃ | | | | |
| | Working Humidity | 5%~95% | | | | |
| | Dimension | 355/250/93mm | | | | |
| | Net Weight | 7.5KG | | | | |
| | Gross Weight | 8.7KG | | | | |
| CHARGER GUN | Connection Type | Case C/Mode 3 | | | | |



- **Simplified installation**
Support wall-mounted or floor standing, can be install in 15 minutes
- **Complete and intuitive interface**
Monitor all charging stages from the screen
- **Always connected**
Through WiFi, Ethernet, 4G and Bluetooth
- **Configuration app and management portal**
One tool to configure the charger and to manage it later by the end client
- **RFID identification**
Authenticate charging sessions and oversee individual usage details
- **Suitable for any environment**
The IP65 and IK10 grades is suitable for public environments
- **Integrated OCPP**
Compatibility with leading worldwide CPOs
- **OEM/ODM or private branding available**



| PLUG AND CHARGE | | EUROPEAN STANDARD | |
|-----------------|---------------------|---|-------------------|
| PARAMETER | Product Name | 3.5KW AC EV Charger | 7KW AC EV Charger |
| | Item No. | EE-ACCXOX-35 | EE-ACCXOX-07 |
| INPUT | Power Input Cable | L,N,PE | L1,L2,PE |
| | Voltage Range | 184V-276V | 184V-276V |
| | Rated Current | 16A | 32A |
| OUTPUT | Rated Voltage | 230V | 230V |
| | Rated Current | 16A | 32A |
| | Rated Power | 3.5KW | 7KW |
| FUNCTION | Plug Type | Type 2 | |
| | Cable Length | 5M | |
| | Housing Material | PC Material | |
| | LED Indicator Lamp | Support | |
| | Charging Way | Plug and Charge | |
| COMMUNICATION | WiFi | Optional | |
| | Bluetooth | Optional | |
| | APP | Optional | |
| SAFETY | RCD | Type A +6mA DC | |
| | IP Rate | IP66 | |
| | Safety Protection | Over Voltage Protection/Under Voltage Protection/Over Current Protection/Leakage Current Protection/Ground Protection/Over Temperature Protection | |
| | Safety Standard | IEC/EN62752 | |
| | Certification | CE/UKCA | |
| | Warranty | One Year | |
| INSTALLATION | Installing Type | No Installation Is Required | |
| | Working Temperature | -30℃-50℃ | |
| | Working Humidity | 5%~95% | |
| | Dimension | 210/85/50mm | |
| | Net Weight | 3.7KG | |
| | Gross Weight | 4.5KG | |
| CHARGING GUN | Connection Type | Case B/Mode 2 | |









85mm

210mm



50mm



-  **Temperature monitoring**
Monitor the working temperature of the charger at all times, Once the safe temperature is exceeded, the charger will stop working immediately, and the charging system can be auto-start when the temperature returns to normal
-  **Automatically repair faults**
Smart chip can automatically repair common charging mistakes to ensure stable operation of the production
-  **Complete certification**
The product has passed all relevant certifications, ensuring that the product can be sold and used with confidence
-  **Plug the charger**
Plug and charge, convenient and quick
-  **Rugged Enclosure**
Adopts PC material, solid and reliable shell, can withstand 1.5T car rolling without damage
-  **OEM/ODM or private branding available**

| PLUG AND CHARGE | | EUROPEAN STANDARD | | | AMERICAN STANDARD | | |
|-----------------|---------------------|--|-------------------|--------------------|-----------------------|-------------------|-------------------|
| PARAMETER | Product Name | 3.5KW AC EV Charger | 7KW AC EV Charger | 11KW AC EV Charger | 16A AC EV Charger | 32A AC EV Charger | 40A AC EV Charger |
| | Item No. | EE-ACCCTX-35 | EE-ACCCTX-07 | EE-ACCCTX-11 | EU-ACCCTX-16 | EU-ACCCTX-32 | EU-ACCCTX-40 |
| INPUT | Power Input Cable | L,N,PE | L,N,PE | L1,L2,L3,N,PE | L1,L2,PE | L1,L2,PE | L1,L2,PE |
| | Voltage Range | 184V-276V | 184V-276V | 304-456V | 110V-265V | 110V-265V | 110V-265V |
| | Rated Current | 16A | 32A | 16A | 16A | 32A | 40A |
| OUTPUT | Rated Voltage | 230V | 230V | 380V | 120V-240V | 120V-240V | 120V-240V |
| | Rated Current | 16A | 32A | 16A | 16A | 32A | 40A |
| | Rated Power | 3.5KW | 7KW | 11KW | 3.5KW | 7KW | 9.6KW |
| FUNCTION | Plug Type | Type 2 | | | Type 1 | | |
| | Cable Length | 5M | | | | | |
| | Housing Material | PC Material | | | | | |
| | LED Indicator Lamp | Support | | | | | |
| | LED Screen | 2.8 Inch | | | | | |
| | Charging Way | Plug and Charge | | | | | |
| | Current Adjustable | Support | | | | | |
| COMMUNICATION | WiFi | Optional | | | | | |
| | Bluetooth | Optional | | | | | |
| | APP | Optional | | | | | |
| SAFETY | RCD | Type A +6mA DC | | | CCID20 | | |
| | IP Rate | IP65 | | | | | |
| | Safety Protection | Over Voltage Protection/Under Voltage Protection/Over Current Protection/ Leakage Current Protection/Ground Protection/Over Temperature Protection | | | | | |
| | Safety Standard | IEC/EN62752 | | | UL2231 | | |
| | Certification | CE/UKCA | | | ETL, CSA, ENERGY STAR | | |
| | Warranty | One Year | | | | | |
| INSTALLATION | Installing Type | No Installation Is Required | | | | | |
| | Working Temperature | -25°C-50°C | | | | | |
| | Working Humidity | 0%-95% | | | | | |
| | Dimension | 240/100/50mm | | | | | |
| | Net Weight | 3.5KG | | | | | |
| | Gross Weight | 4KG | | | | | |
| CHARGING GUN | Connection Type | Case B/Mode 2 | | | | | |






- Temperature monitoring**
Monitor the working temperature of the charger at all times, Once the safe temperature is exceeded, the charger will stop working immediately, and the charging system can be auto-start when the temperature returns to normal
- Automatically repair faults**
Smart chip can automatically repair common charging mistakes to ensure stable operation of the production
- Complete certification**
The product has passed all relevant certifications, ensuring that the product can be sold and used with confidence
- Plug the charger**
Plug and charge, convenient and quick
- Rugged Enclosure**
Adopts PC material, solid and reliable shell, can withstand 1.5T car rolling without damage
- Current adjustable**
- OEM/ODM or private branding available**



CPO Business Solution

Provide multi-site, visual charger, charging station access operation management solutions

-  Operator
-  Office Building
-  For Personal




Key features of our iOS & Android apps

Easy sign-up & login

- Smart user profile with all relevant information
- Fast start: Start charging with RFID, QR code or charger ID
- Map view: Integrated Google maps with advanced filters and custom icons
- List view: List of chargers with filters and detailed charger information
- Payment history & Invoices
- Multiple vehicle management
- Multiple payment gateways
- Smart scheduling. Save money when power is cheap
- Support for Roaming platforms
- Multiple language support
- Fully GDPR compliant

Services

- EV sourcing: We source and supply hardware to customers location.
- Software support with user-friendly apps & back-end.
- Multi-language support for any country.
- Custom payment gateway integration for optimal localization.
- Custom apps and back-end white label solutions for large scale customers.

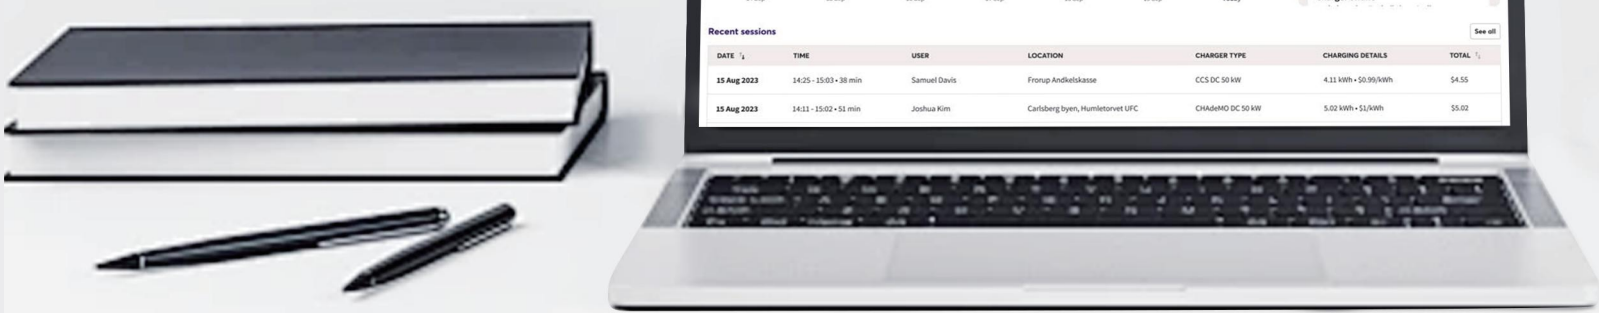



Our back-end is all you need to run your EV business!

It's never been easier to have a complete overview of your charge station, users and consumption.

Key functions are:

- Dashboard with most important KPIs
- Business administration
- Condominium management
- Support of business and private accounts
- Chargers (add/edit)
- User details
- with easy search function
- Subscription management
- Location management
- Flexible reporting and export
- Error management
- Invoicing
- EMS



Partially-public

Provide public access to chargers without showing location in app. Solely reachable through QR code or charging key.




Multiple payment options

Make payments using Google Pay, Apple Pay, a credit card, or a charge key.



Segmented users

Regulate charge point access and usage for members, guests, and fellow EV drivers.



Public & private mode

During peak hours, allocate chargers exclusively to members. Public access available during off-peak hours.



RFID Charge keys

Add any RFID key to our app or acquire an RFID key, enabling app-free charging access.



Capacity to grow

Effortlessly adjust charge points and users using our online platform, allowing flexible and fast scalability.



QR Code

After scanning the QR code displayed on the EV Charger screen, drivers can both charge and make payments using their preferred method.



App

Utilizing app, most EV drivers can conveniently charge and pay.



Microinverter

Easy PV (APP)


EMS system

Solar Micro-inverter 300W-2000W

Multiple solar panel Connection

MPPT, EMS System, APP Control, IP67

EU Efficiency: 93.6%

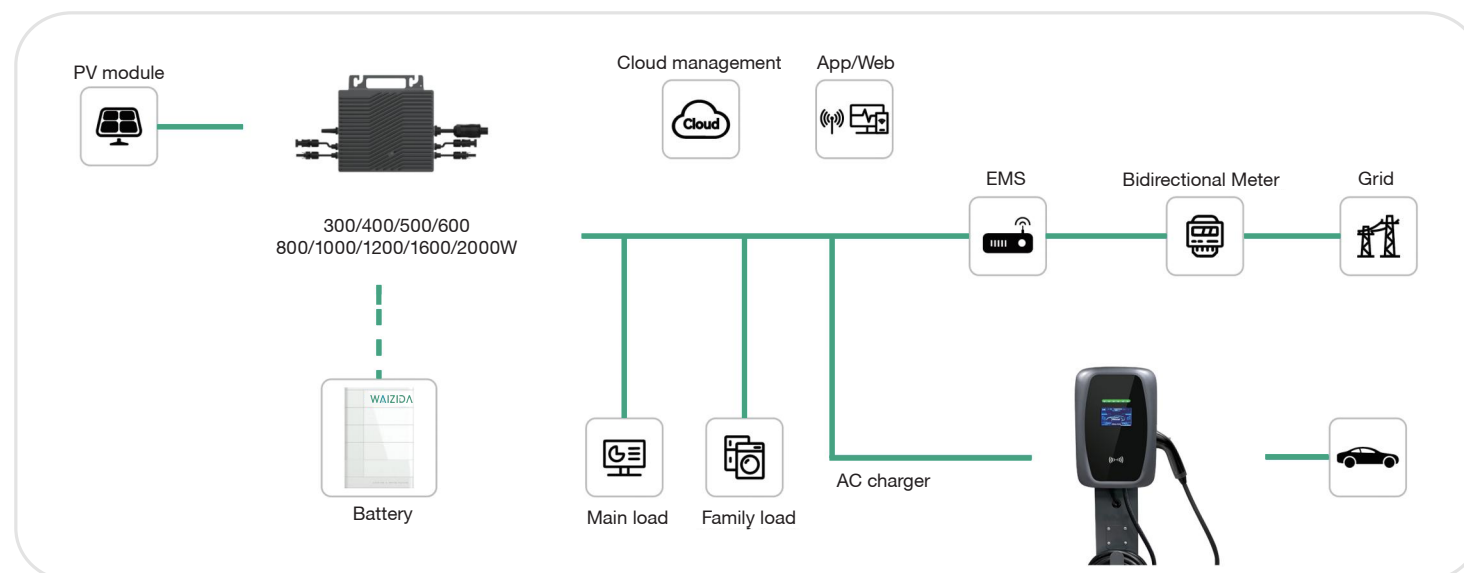

ACCESSORIES



Adapters

GBT to Type2, Type1 to Type2, Type1 to Tesla, or opposite




Inverter

Connect the solar system and ev chargers



RFID card

Private card/operation card



CT clamp

For dynamic load balancing



DLB

Real-time balancing of home appliance with EV Charging



Charging cable 7kW/22kW

5m/7.5m, Type 2 to Type 2 comes with a carry bag



Pedestal with roof

For charging station mounting



MID meter

Monitor your consumption/Dynamic Load Balance



Cable hook

Convenient for keeping your charging cable organized



Dynamic Load Balancing

Ensure electrical safety by dynamically adjusting charging current, protecting fuses, and avoiding expensive grid upgrades

Solar Charging

Solar Only
Utilize the surplus energy from the solar to charge your EV

Solar Smart
Prioritize using only the solar surplus for EV charging

Combine grid and solar power to charge electric vehicles, maximize cost savings and reduce carbon footprint

OCPP & Local EMS

Integrated with mainstream third-party OCPP back-end provider Open MODBUS interface for EMS integration

MID Grade Charging Bill

Track and control your charging costs with accurate MID-grade consumption

Easily view and categorize your charging activities by time, authorization, and car type

Export your charging bill with a single tap and send it to your email effortlessly


10 Mins Hassle-Free Installation

Sandwich structure, effortless installation, maintenance free



Plug and Play Power Distribution System with Busbar

ECPC HUB with RCD, SPD, MID metering, and EMS, ECPC UNIT with upstream RCD. Maximize installation and hardware cost-saving

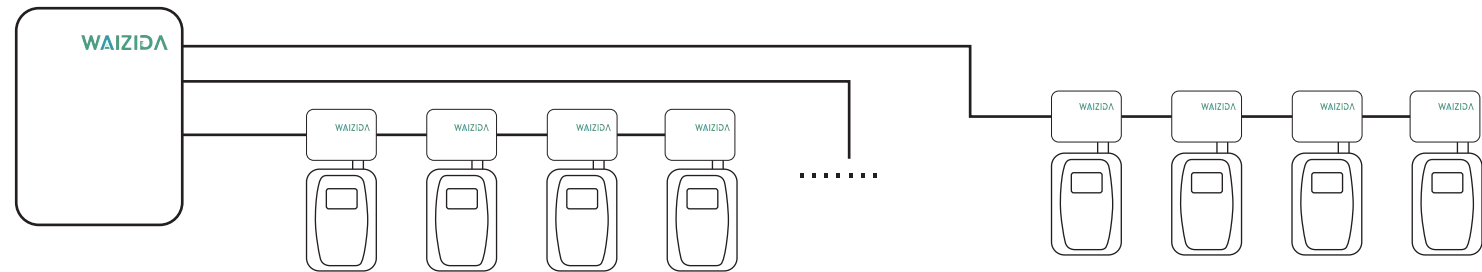

Daisy Chain Connectivity

Implement Ethernet connectivity for OCPP and Modbus TCP in series, minimize networking hardware cost and reduce commissioning effort

